

SK-FFT

Fire Fighters Telephone Control System

Silent Knight's addressable detectors, modules, pull stations, annunciators, power supplies and accessories are specifically engineered to ensure installation and maintenance are simple and efficient.

The SK-FFT is a Fire Fighters Telephone Communication System. The SK-FFT with keypad, provides indications of phone activation, and corresponding trouble conditions. The FFT-24 expander board lets you add additional zones to the SK-FFT.

The SK-FFT can use one FFT-24 for a total of 48 zones. Each zone consists of one addressable monitor module (SK-Minimon) and a minimum of one Fire Fighter Telephone Jack (FFT-FPJ)

INSTALLATION

The SK-FFT can be surface or flush mounted. Use VIP-TR Trim Ring for flush mounting.

COMPATIBILITY


The SK-FFT is compatible with the following FACPs

- 6820: Addressable fire alarm control panel
- 6820EVS: Addressable fire alarm control panel with an emergency voice system.
- 6808: Addressable fire alarm control panel
- 6700: Addressable fire alarm control panel
- 5700: Addressable fire alarm control panel
- 5808: Addressable fire alarm control panel
- 5820XL: Addressable fire alarm control panel
- 5820XL-EVS: Addressable fire alarm control panel with an emergency voice system.
- 5895XL: Power Supply

For retrofit projects: compatible with any UL listed 24V regulated power supply

FEATURES AND BENEFITS

- SK-FFT Fire Fighter Telephone module for control and annunciation of up to 48 remote telephone jacks
- A maximum of 10 Fire Fighter Remote Handsets (FFT-RHS) can be used at one time to communicate over the telephone circuit connected to the SK-FFT
- Fire Fighter Phone Jack (FFT-FPJ) provides a plug-in location for the FFT-RHS
- Single Telephone Station Mount comes in a lockable cabinet containing one remote handset. Available in Recessed mount (FFT-STSR) or surface mount (FFT-STSS)
- Fire Fighter Handset Cabinet (FFT-HSC) is used to store ten Fire Fighter Handsets (FFT-RHS) System Status LEDs
- Supports a single FFT-24 zone expander
- The SK-FFT supports up to 48 SK-Minimon devices on one FFT system
- One Form C trouble relay
- JumpStart® auto-programming

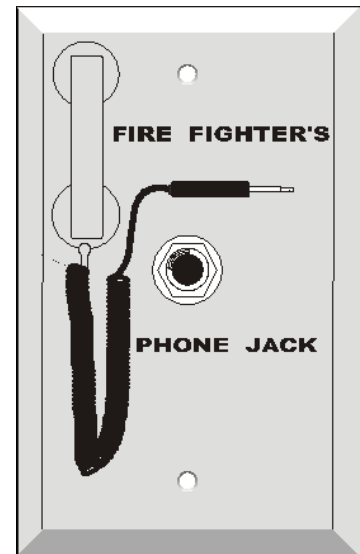

SK-FFT TECHNICAL SPECIFICATIONS

PHYSICAL

Flush Mount Dimensions: 20¼" W x 26¾" H x 2.5"– 3" D (51.4 W x 68 H x 6.4–7.6 D cm)

Overall Dimensions: 20" W x 26½" H x 4.6" D (50.75 W x 67.3 H x 11.8 D cm)

Weight: 53 lbs.

Color: Red

ENVIRONMENTAL

Operating Temperature: 32°F to 120°F (0°C to 49°C)

Humidity: 10 to 93% relative humidity (non-condensing)

ELECTRICAL

Voltage for the SK-FFT must be a power-limited, filtered, non resettable nominal 24 VDC source.

The voltage source must be within the range of 17-29 VDC.

Active Current: 230 mA

Standby Current: 120 mA

SLC Circuit: 32V; 150mA

Audio Circuits: 17V; 53mA

AGENCY LISTINGS AND APPROVALS

UL Listed

ORDERING INFORMATION

SK-FFT: Fire Fighters Telephone

SK-Minimon: Mini monitor module

SK-ISO: Fault Isolator Module

ECS ACCESSORIES

FFT-24: 24 Zone Expander

FFT-FPJ: Remote Phone Jack

FFT-RHS: Fire Fighters Remote Hand Set

FFT-HSC: Fire Fighters Handset Cabinet. Holds up to 10 remote handsets

FFT-STSR: Single Telephone Station Recessed. A lockable cabinet containing one remote handset.

FFT-STSS: Single Telephone Station Surface Mount. A lockable cabinet containing one remote handset.

FFT-BGK: Break Glass Kit for FFT-STS

VIP-TR: Flush Mount Trim Ring

For a complete listing of all compliance approvals and certifications, please visit www.silentknight.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up to date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

Honeywell Silent Knight

12 Clintonville Road
Northford, CT 06472-1610
800-328-0103
www.silentknight.com